



AT350 CLAMP-BAND

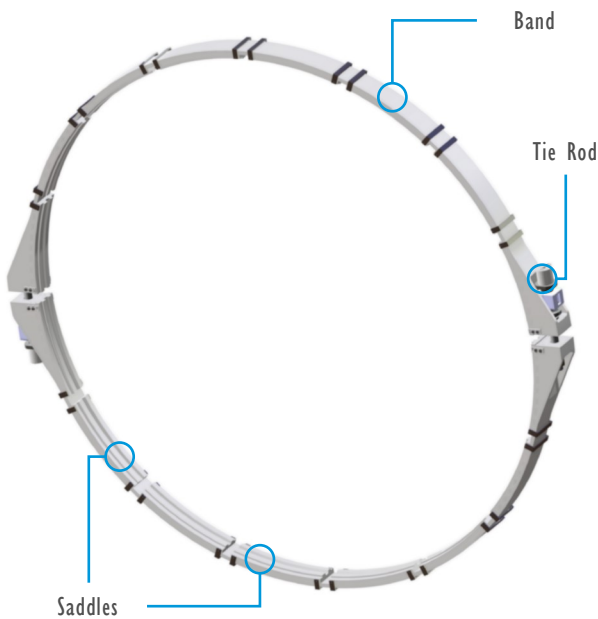

- Clamp-band tightening tensions are computed according to payload and use.
- The item is provided with a tension monitoring display.
- Tie rods are equipped with Superbolts™.
- This clamp-band is designed to withstand handling and transport activities, vibration and thermal tests.

TRANSPORT



2100 x 1400 x 450 mm

DELIVERABLES DOCUMENTS

Operating Handbook	Risk Analysis	DML-DPL
FMECA	Test Report	Analysis Report

PHYSICAL CHARACTERISTICS

Dimensions Ø x H	1860 x 99 mm	
Net Mass	41 kg	
Safety Factors	Yield	Depending on activity and adapter
	Ultimate	
S/C Interface	LIR PSA 1666 MVS	

PERFORMANCES

Payload WLL Depending on activity and combined adapter

RANGE COMPATIBILITIES



OPERATIONAL CHARACTERISTICS

Environnement Specifications	Monitoring systems	Tension	
		ISO 8	
	Thermal Vacuum	-60°C ; +60°C	
		10 ⁻⁶ bar	
	Vibration tests		
ATEX II 2 G–II BT 4			

HERITAGE



Pictures coming soon