


AT350 VERTICAL INTEGRATION STAND

ISO 8

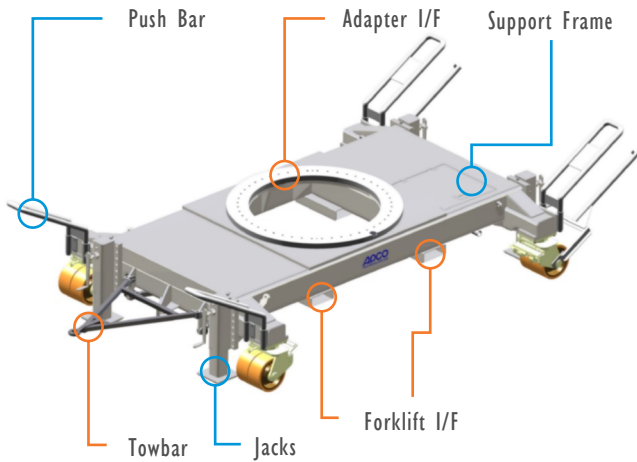

PHYSICAL CHARACTERISTICS

Dimensions L x W x H (without EDU)	4070 x 2490 x 1119 mm	
Net Mass	2670 kg	
Allowable envelop Ø	4000 mm	
Safety Factors	Yield	3
	Ultimate	4
Load Factors	Static	1.5
	Dynamic	1.1
Adapters I/F	48 x M16 threaded holes on a Ø1260 mm circle pattern	

TRANSPORT

- On a pallet under tarpaulin
- By truck, ship or plane

PERFORMANCES


Payload WLL*	5175 kg
--------------	---------

* @ 1g vertical and ±0.1g lateral accelerations

OPERATIONAL CHARACTERISTICS

Number of Jacks / Wheels	4	
Facility handling	EDU	Towbar
	Pushbar	Forklift
	Crane	
Environnement Specifications	ISO 8	
	Hydrazine Compatible	

RANGE COMPATIBILITIES

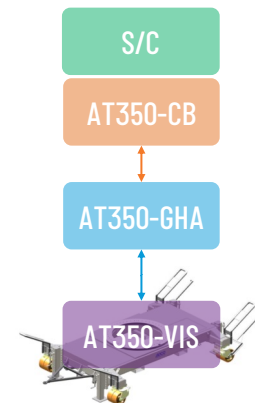

DELIVERABLES DOCUMENTS

Operating Handbook	Risk Analysis	DML-DPL
FMECA	Test Report	Analysis Report

HERITAGE



Pictures coming soon